

Hyper A+ Server AS -1125HS-TNR

1U Hyper with 8 hot-swap 2.5" NVMe/SAS/SATA bays and 3 PCIe 5.0 x16 slots



More details here

Key Applications


Virtualization, Software-defined Storage, AI Inference and Machine Learning, Cloud Computing, Enterprise Server,

Key Features

- 4th Generation AMD EPYC™ 9004 Series Processors;
- ASPEED AST2600;
- 24x DIMM slots, DDR5-4800MHz memory, support up to 6 TB;
- Flexible networking options with 1 AIOM networking slot (OCP NIC 3.0 compatible)
 - 2 PCIe 5.0 x16 FH, 10.5"L
 - 1 PCIe 5.0 x16, FH, 6.6"L;
- 800/1200W Redundant Power Supplies (Titanium Level);(*Full redundancy based on configuration and application load);
- 2 On-board PCIe 3.0 x4 M.2 NVMe 80mm/110mm (Boot);




Form Factor	1U Rackmount Enclosure: 437 x 43 x 747mm (17.2" x 1.7" x 29.4") Package: 605 x 206 x 1032mm (23.8" x 8.1" x 40.6")
Processor	Dual Socket SP5 AMD EPYC™ 9004 Series Processors Up to 256C/512T
System Memory	Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 6TB 4800MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 8 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bay(s) Option A: Total 12 bay(s) <ul style="list-style-type: none"> • 12 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bay(s) (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 3.0 x4 NVMe slot(s) (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 FHHL slot(s) • 2 PCIe 5.0 x16 FH/10.5"L slot(s) • 1 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible)
On-Board Devices	Chipset: System on Chip Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) USB: 2 USB 3.0 port(s) (rear) 1 USB 3.0 port(s) (front) Video: 1 VGA port(s)

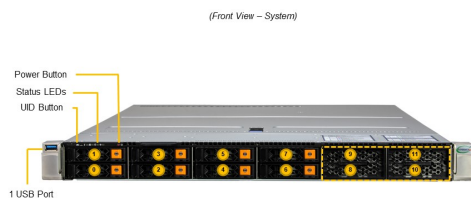

Slot	Description
① ②	2.5" Hot-Swap NVMe™/SAS3/SATA3 [*] Drive Bays (Default)
③ ④	2.5" Hot-Swap NVMe™/SAS3/SATA3 [*] Drive Bays (Optional)**

^{*} NVMe/SAS3/SATA3 function depending on option chosen from optional parts list

^{**} Drive trays and backplane optional for drive slots 8-11; see optional parts list

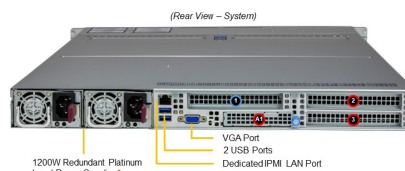

Slot	Description
①	PCIe 5.0 x16 (FH, 6.6" L)
②	PCIe 5.0 x16 (FH, 10.5" L)
③	PCIe 5.0 x16 (FH, 10.5" L)
④	PCIe 5.0 x16 AOM Slot (NCSS)

^{*} Full redundancy based on configuration and application load.

CPU 1

CPU 2

System Cooling	Fans: 8 counter-rotating 40x40x56mm Fan(s)
Power Supply	1x 1200W Redundant Titanium Level power supply
System BIOS	BIOS Type: AMI 256MB SPI Flash BIOS Features: UEFI 2.8 SMBIOS 3.5 or later ACPI 6.4 Plug and Play (PnP) USB Keyboard support
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; TAS: Supermicro Thin-Agent Service (TAS); SAA(new!)
PC Health Monitoring	FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: System temperature, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, CPU thermal trip support
Dimensions and Weight	Weight: Gross Weight: 51 lbs (23.1 kg) Net Weight: 32 lbs (14.5 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super H13DSH
Chassis	CSE-HS119-R1K24P2-A