

SuperWorkstation SYS-751A-I

DP full rackmount tower workstation for 3D design and content creation



More details here

Key Applications

Rendering, CAD, Multimedia/Digital Content creation, Engineering/scientific research,


Key Features

- 5th/4th Gen Intel® Xeon® Scalable processor support;
- Intel® C741 Chipset;
- 5 PCIe 5.0 x16, 1 PCIe 5.0 x8, 2 NVMe M.2 slots;
- 4x internal 3.5" SATA rotating drive bays for easy access
2x 5.25" peripheral drive bays
up to 4x NVMe SSD support with optional cables and converter trays
2x 2.5" Front access SATA drive bays with hot swap;
- Compact and quiet operation
New front bezel with keylock for added security;
- Supports up to two double width active GPUs
1 VGA, 6 USB 3.2 Gen1 (4 Rear, 2 Front), 2 USB 3.2 Gen2 (1 internal, 1 Front type C), 2 USB 2.0, 7.1 HD Audio;



Form Factor	Tower or 5U Rackmount Enclosure: 221 x 536 x 574mm (8.7" x 21.1" x 22.6") Package: 371 x 701 x 711mm (14.6" x 27.6" x 28")
Processor	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Up to 64C/128T; Up to 320MB Cache per CPU
GPU	Max GPU Count: Up to 2 double-width GPU(s) Supported GPU: NVIDIA PCIe: T400, RTX A5500, T1000, RTX A6000, RTX A5000, RTX A4500, RTX A4000, RTX A2000, RTX 6000 Ada Generation CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 4 bay(s) • 4 front hot-swap 3.5" NVMe/SAS*/SATA drive bay(s) Option A: Total 6 bay(s) • 4 front hot-swap 3.5" NVMe/SAS*/SATA drive bay(s) • 2 front hot-swap 2.5" NVMe/SAS*/SATA drive bay(s) (*SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe slot(s) (M-key 2280/22110) Peripheral Bays: 2 5.25" bay(s) (optional)
Expansion Slots	Default • 5 PCIe 5.0 x16 FHFL slot(s) • 1 PCIe 5.0 x8 FHHL slot(s)
On-Board Devices	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support Chipset: Intel® C741 Network Connectivity: 2 RJ45 10GbE
Input / Output	LAN: 2 RJ45 10 GbE LAN port(s) (IPMI shared on LAN port 1) USB: 4 USB 3.2 Gen1 port(s) (rear) 5 USB 2.0 port(s) (front) Video: 1 VGA port(s) DOM: 2 SATA DOM (Disk on Module) port(s)

Audio: 7.1 HD Audio
Line Out
Mic in

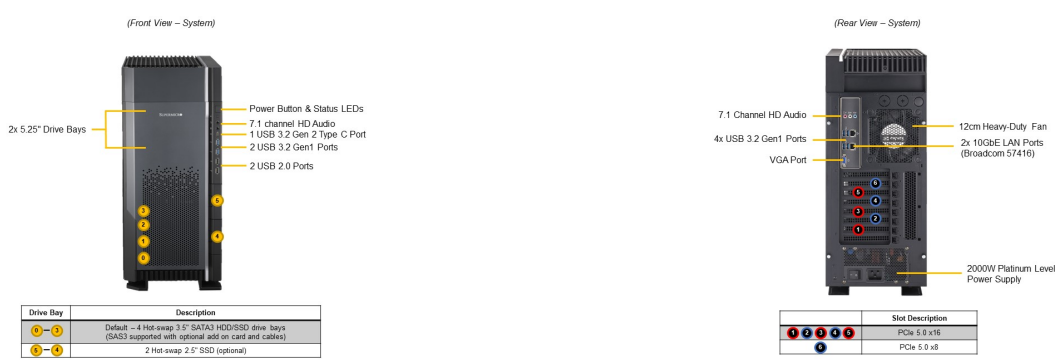

System Cooling	Fans: 3x 12cm Fan(s)
Power Supply	1x 2000W Platinum Level power supply
System BIOS	BIOS Type: AMI 32MB SPI FLASH ROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; TAS: Supermicro Thin-Agent Service (TAS); SAA(new!)
PC Health Monitoring	Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors FAN: Status monitor for speed control Pulse Width Modulated (PWM) fan connectors CPU: Monitors for CPU Cores, Chipset Voltages, Memory.
Dimensions and Weight	Weight: Gross Weight: 59.5 lbs (27 kg) Net Weight: 56.2 lbs (25.5 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X13DAI-T
Chassis	CSE-GS7A-000NBP3